

MIRRORSTONE


LIGHTING SPECIALIST

EasiLight Decking Lights

MS-EZI-SL2-12, MS-EZI-SL4-12

1. Features

- Made from high-quality aluminium, this series of downlights feature an exquisite appearance and smooth feel, as well as boasting advanced waterproof technology.
- It's also quite small in size, and can be installed in a series for sophisticated lighting effects.
- Control this light with an EasiLight controller such as:

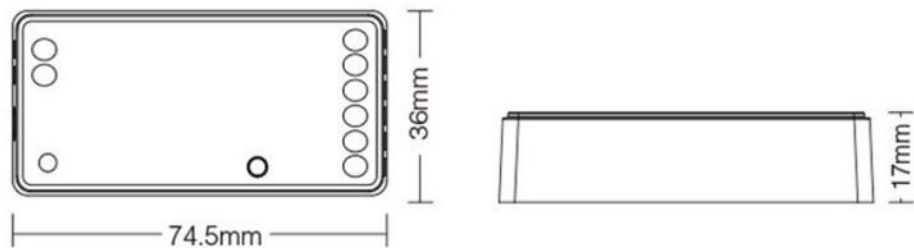

MS-FUT037W & MS-FUT038W

2. Product Specifications

Model No: SL1-12 / SL2-12 / SL3-12 / SL4-12

Input Voltage: DC12V

Power: 3W




Beam Angle: 36°

IP Rating: IP66

Working Temp: -10-40°C


Material: Aluminium

Hole Size: Ø33-36mm

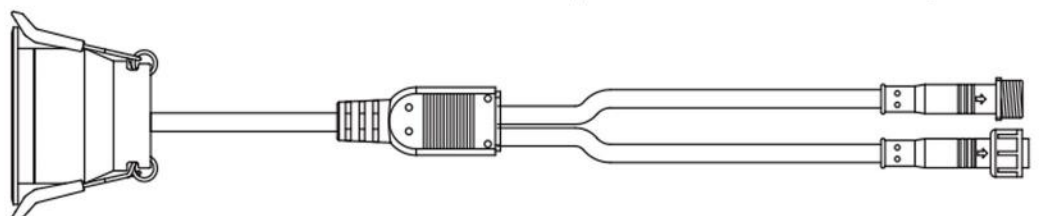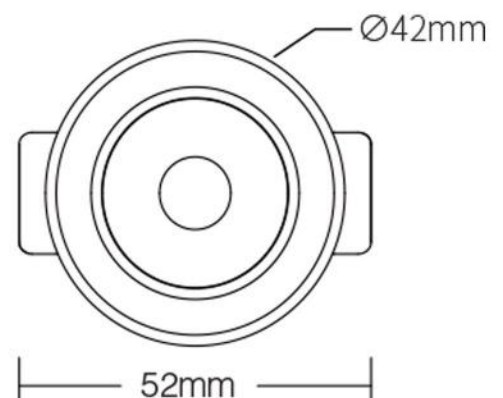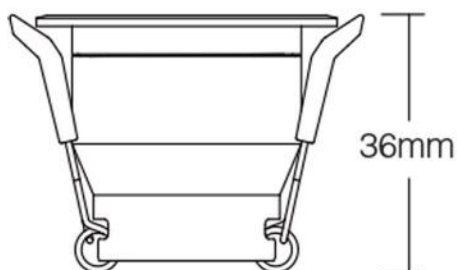

3. Connection Diagram

Please ensure that you are using the correct controller for your lights (ie. Single colour controllers should only be used with single colour lights, RGB controllers should only be used with RGB lights etc). These controllers are sold separately.

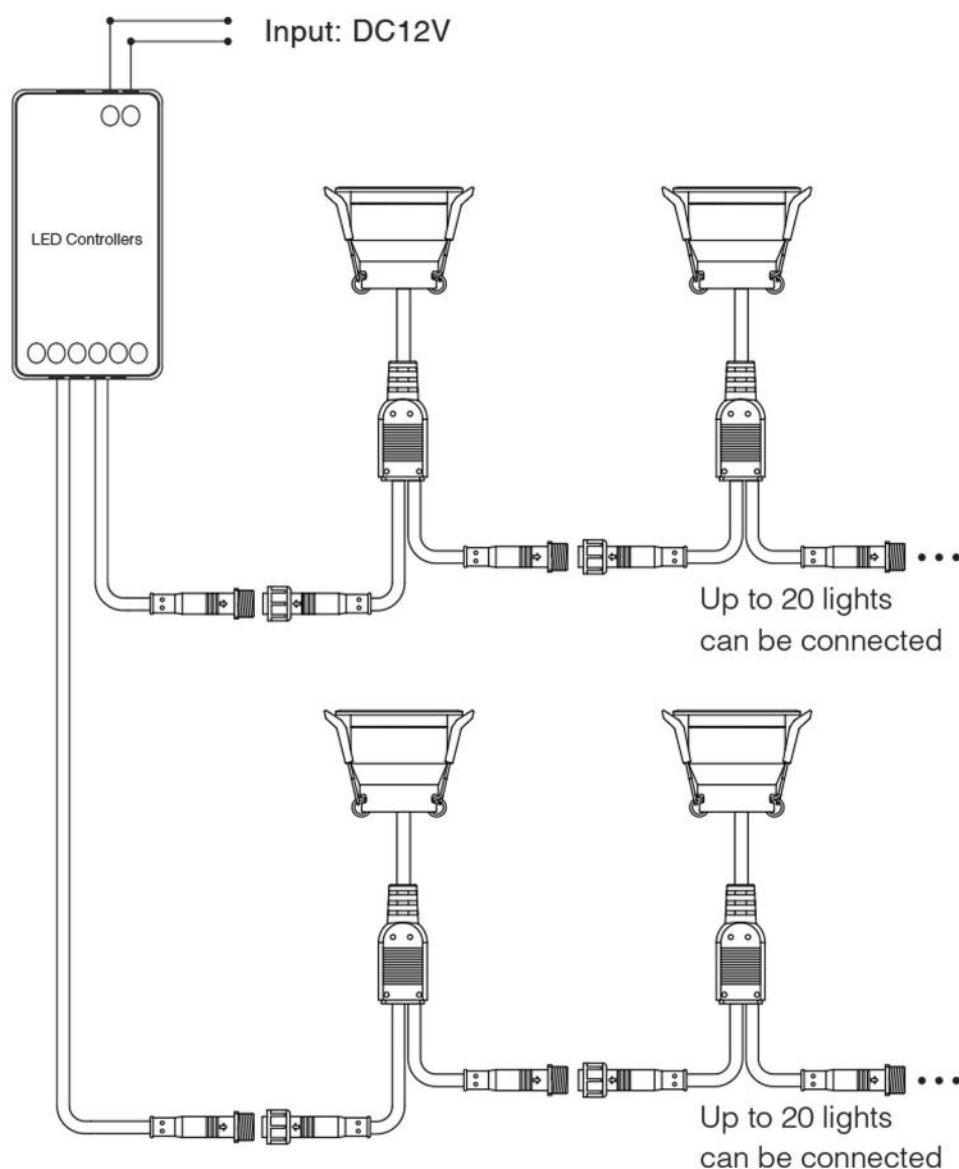


4. Wiring Instructions

Model No.: SL1-12



Red: LEDV+
Black: LEDV-

Model No.: SL2-12



Red: V+
Black: CW
Yellow: WW


Model No.: SL3-12



Yellow: V+
Red: R
Green: G
Blue: B

5. Installations

- 1.Create an opening as seen in image 1. This should be between \varnothing 33-36mm in diameter.
- 2.Connect your lights according to the connection diagram in section 3.
- 3.Make the spring buckles on both ends of the light upright, then place them into the holes.

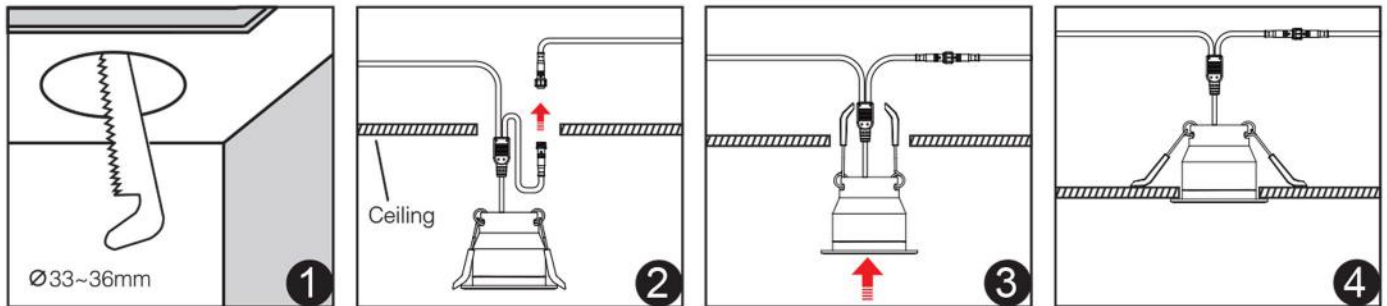

6. Attention

- 1.Please check that the input voltage is DC 12v. Otherwise there could be damage to your devices.
- 2.You must not cover or wrap metal parts of the light with plastic or insulation. This will affect the heat dissipation of your lights, increasing fire risk while decreasing their lifespan.
- 3.Only professionals should dismantle these lights, to avoid the risk of damage to the equipment.

MIRRORSTONE

L I G H T I N G S P E C I A L I S T

sales@mirrorstone.co.uk
www.mirrorstonelighting.co.uk/
86 Scudamore Road Leicester, LE3 1UQ
+44 (0) 116 321 4121